PENTAIR JUNG PUMPEN

SKS 1000

VUILWATERSCHACHTEN



- Volgens DIN EN 13598-2
- Berijdbaar tot verkeers D 400
- Corrosiebestendig
- Anti opdrijfbestending en grondwaterdicht
- Inbouwdiepte 4,90 m

BESCHRIJVING

The buoyancy proof and practicable plastic sump in high-grade polypropylene (PP) corresponds to EN 13598-2. It is suitable for use in areas with traffic load up to 40 tons. (DIN EN 124, group 4). The SKS 1000 can be placed on natural ground without concrete works. The modular design offers easy transport and installation.

In order to adjust the pumping stations to the required pumping conditions a wide range of drainage pumps is available.

Both versions (single- and duplex units) have a spigot for inlet, two sockets with seal for ventilation/cable pipe, a facility for installing a flushing connection and a pressure outlet DN 50.

The standard installation depth without a cover is 2.27 m. The installation depth can be extended to 4.90 m by the use of sump extensions
(installation depth in ground water not more than 5 m). The total volume is 1372 litres. The volume storage below the inlet is 396 litres.

If extensions are used, one of the extensions must be ordered with a tie-bar.

SKS 1000
VUILWATERSCHACHTEN

LEVERINGSOMVANG

SKS-D 1000-50 (Single unit)

The poly-sump consist of an underpart with an inlet and a discharge branch, an extension element, a cone 1000/625 and a concrete support ring for the manhole cover (accessory). The segments are sealed with sealing rings.

Inlet socket DN/OD 160 (DN 150) for PVC collar (KGU), 2 sockets DN 100 for ventilation/cable duct,1 socket plug DN 100.

Guide rail system, pipework DN 50, elbow ball check valve DN 50, stop valve in DN 50 in stainless steel

SKS-D 1000-D50 (Duplex unit)

The poly-sump consist of an underpart with an inlet and a discharge branch, an extension element, a cone 1000/625 and a concrete support ring for the manhole cover (accessory). The segments are sealed with sealing rings.

Inlet socket DN/OD 160 (DN 150) for PVC collar (KGU), 2 sockets DN 100 for ventilation/cable duct, 1 socket plug DN 100, coupling feets, pressure outlet DN 50, ball check valve DN 50, maintenance stop valve DN 50.

SKS 1000

Type	**Art.-Nr.**	Gewicht
SKS-D 1000-50	**JP50303**	285 kg
SKS-D 1000-D50	**JP50304**	305 kg


MOGELIJKE POMPEN

SKS-D 1000-50	US 151 ES/DS	US 73 E/D
US 62 ES/DS	UV 620-1 S	US 103 E/D
US 102 ES/DS	UV 620-3 S	US 153 E/D
US 152 ES/DS	UV 625-3 S	US 253 D
US 73 ES/DS	UV 635-3 S	US 75 E/D
US 103 ES/DS	SKS-D 1000-D50	US 105 E/D
US 153 ES/DS	US 62 E/D	US 155 E/D
US 253 DS	US 102 E/D	UV 620-1
US 75 ES/DS	US 152 E/D	UV 620-3
US 105 ES/DS	US 151 E/D	UV 625-3
US 155 ES/DS	US 251 D	UV 635-3

PENTAIR JUNG PUMPEN . 33803 Steinhagen . Tel. +49 5204 170 . Fax +49 5204 80368 . E-Mail: nl.jp@pentair.com

SKS 1000
VUILWATERSCHACHTEN


SKS-D 1000

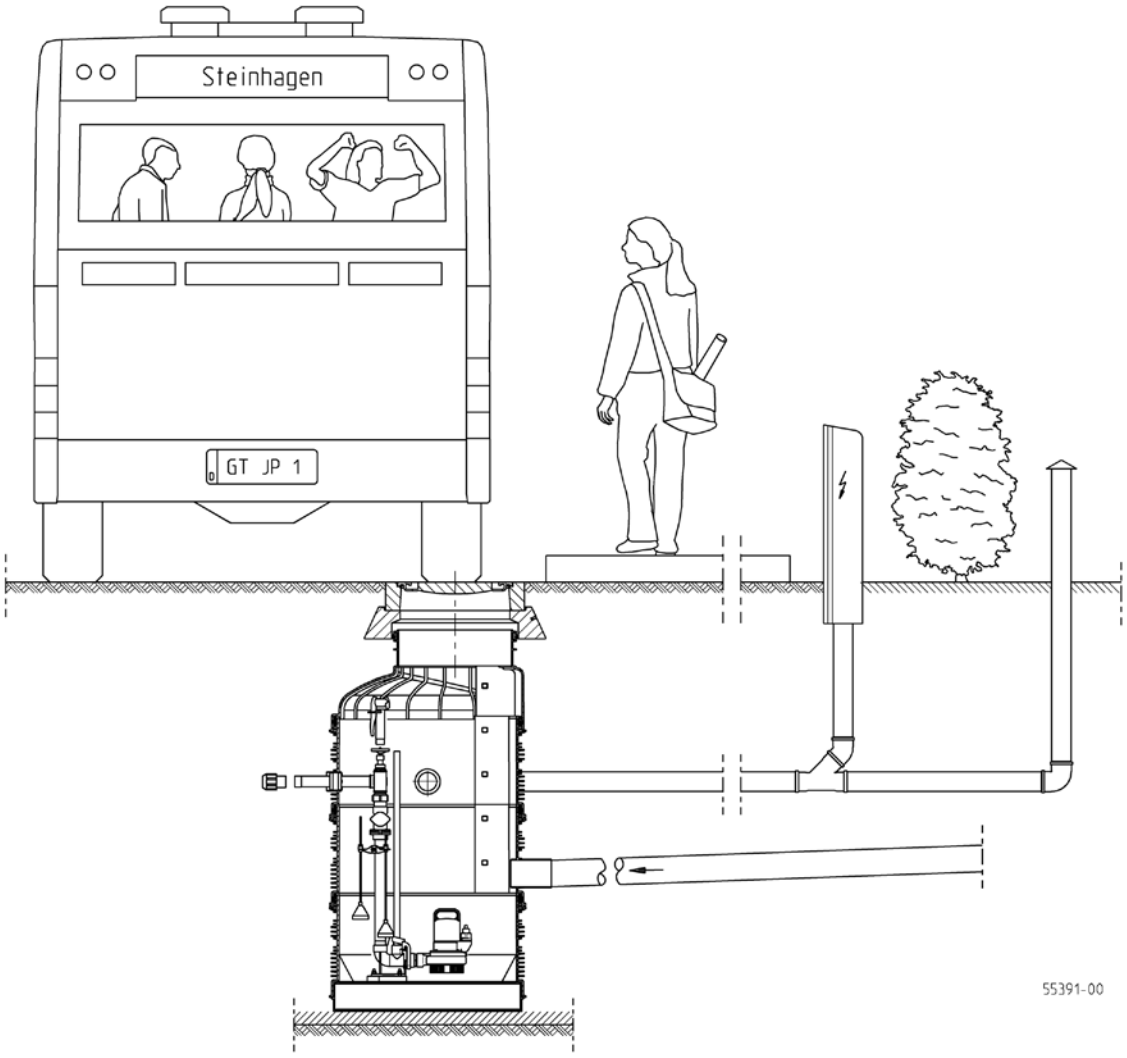


Attention: Concerning space capacity the installation of submersible switches is not possible.

SKS 1000
VUILWATERSCHACHTEN


SKS-D 1000/SKS-D 1000-D50

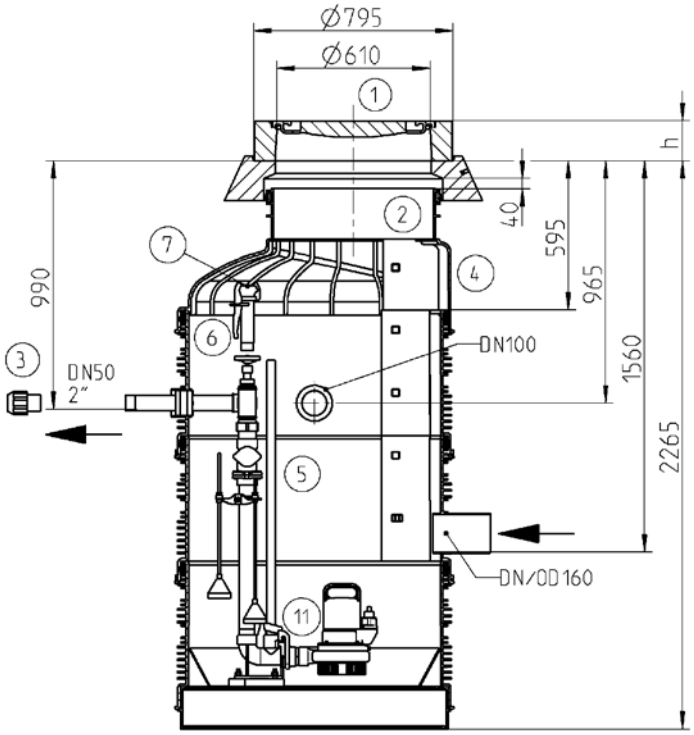

With ladder

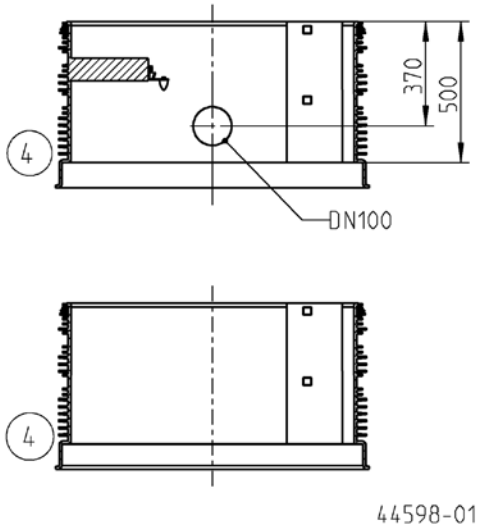

44598-01

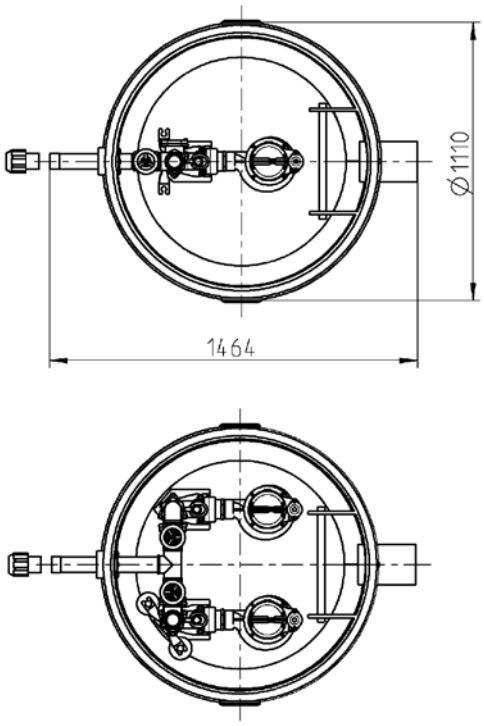


49757-02

PENTAIR JUNG PUMPEN . 33803 Steinhagen . Tel. +49 5204 170 . Fax +49 5204 80368 . E-Mail: nl.jp@pentair.com

SKS 1000
VUILWATERSCHACHTEN

PUT ACCESSOIRES

					Art.-Nr.
	①	**Betonnen afdekking**			
		afdekplaat Kl. B	o. Ventilatie, Ø 610, h= 125	110 kg	**JP44972**
		afdekplaat Kl. D	o. Ventilatie, Ø 610, h=160	190 kg	**JP29175**
	②	**Toegangshulp**			
		Toegangshulp d.m.v. Handgreep			**JP44610**
		Toegangshulp d.m.v. Huls			**JP44611**
	③	**Geschroefde verbinding**			
		2" tot Ø 63 mm (DN 50)			**JP45950**
	④	**Reservoir uitbreiding**	PSV-D 1000x500 SGT	Doorkruisen, klimmen	34,0 kg	**JP44407**
			PSV-D 1000x500 SG	Klimmen	16,6 kg	**JP44403**
	⑤	**Geleidebuis, roestvrij staal**	1", 1150 mm, schachtdiepte 2,27 m		2,8 kg	**JP50268**
			1", 1650 mm, schachtdiepte 2,77 m		4,0 kg	**JP50269**
			1", 2150 mm, schachtdiepte 3,27 m		5,2 kg	**JP50270**
			1", 2650 mm, schachtdiepte 3,77 m		6,5 kg	**JP50271**
			1", 3150 mm, schachtdiepte 4,27 m		7,5 kg	**JP50272**
			1", 3650 mm, schachtdiepte 4,77 m		9,0 kg	**JP50273**
	⑥	**Perrot**	Spoelaansluiting -65/80, 11/2"		3,2 kg	**JP22353**
	⑦	**Accessories voor Perrot spoelaansluiting**				
		Perrot slangaansluiting	Ø 50 mm			**JP19202**
		Perrot Vacuümbreker				**JP22422**
		Perrot drukmeetapparaat				**JP44854**
		Perrot klauwkoppeling				**JP22420**
	⑧	**Beluchtingspijp**	DN 100 roestvrijstaal, 700 mm			**JP44858**
	⑨	**Tweede of gewijzigde inlaat**		DN 150		**JP44523**
				DN 200		**JP44524**
				DN 250		**JP44525**
	⑩	**Afdichtingssmeermiddel**	1 kg pot (genoeg voor 2 pakkingen)			**JP44605**
			Emmer van 3 kg			**JP44606**
	⑪	**Reduceermof**	1½"-2" voor montage van pompen met 1 1/2" afvoer			**JP48069**
	⑫	**Veiligheidshende**	voor US 75, US 105, US 155, roestvrij staal			**JP41024**