PENTAIR JUNG PUMPEN

VACUBOX

DRENA-LINE LIFTING STATION




- 240l water-tight tank under floor
- Variable installation depth
- Compact dimensions
- Floor drain with odour trap
- Wide range
- Installation above floor and
- Sturdy and resistant

DESCRIPTION

VACUBOX 200 is for bigger domestic wastewater volume and larger storage capacity. Without requiring a great deal of construction work, it disposes of domestic wastewater from laundries, storage or cellar areas.

VACUBOX 200 can be installed as a single as well as a duplex system. The required components for the installation of the pumps are part of the scope of supply. The duplex system provides bigger security in the disposal of wastewater. In normal operation the two pumps operate alternately or at the same time to cope with peak load. The pump to be placed can be selected according to the amount of wastewater, the type of dirty water and the pumping power required. By adjusting the plastic cover frame, the sump cover can be adapted easily and variably to the floor and tile conditions. The unit is compliant with EN 12050 standard.

PERFORMANCE

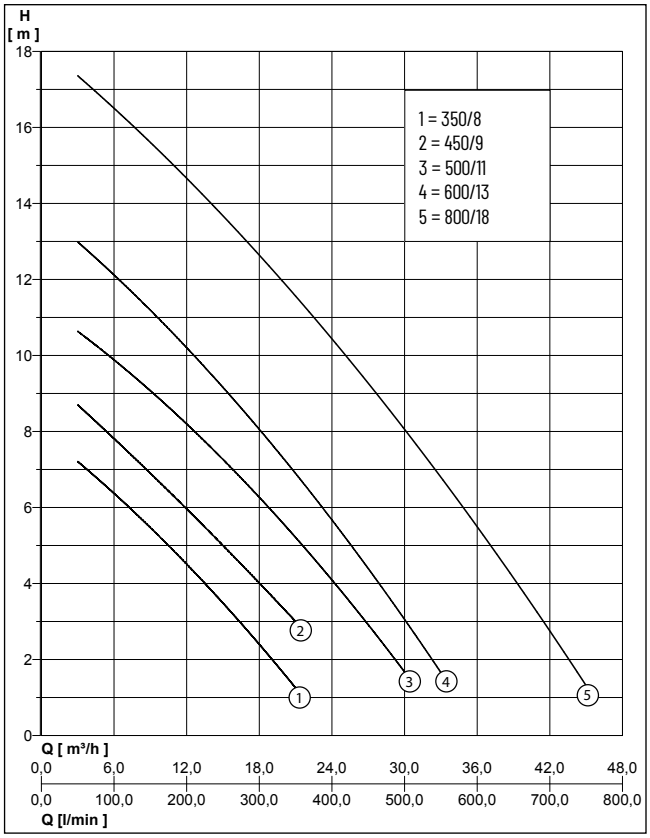

Type	Delivery head H [m]	3	4	5	6	7	8	9	10	11	12	14	16
PRIOX 50-350/8 EN M/T	Flow rate Q [m³/h]	16.5	13.5	10.5	7.1	3.7							
PRIOX 50-450/9 EN M		21.0	18.0	16.0	12.0	9.0							
PRIOX 50-500/11 EN M/T		26.8	24.3	21.5	18.8	15.8	12.5	9.0	5.5				
PRIOX 50-600/13 EN T		30.0	28.0	25.5	23.2	20.5	18.2	15.1	12.5	9.7	6.3		
PRIOX 50-800/18 EN T			39.0	36.9	34.8	31.0	30.0	27.5	25.0	22.8	19.9	14.0	7.8

VACUBOX

DRENA-LINE - LIFTING STATION

MECHANICAL DATA

Free passage	50 mm	Mechanical seal	Graphite. Lubricated in oil chamber
Bearing	Self-lubricating ball bearings.	Contourface	Ceramic. Lubricated in oil chamber
Oil chamber	Yes	Type of liquid	waste water with suspended solids of maximum size 50 mm.
Shaft	Stainless steel X 12 CrNiS 1809 (AISI 416)	Temperature of the liquid max.	40 °C
Impeller	Stainless steel X5CrNi18-10 (AISI 304)		
Pump housing	Stainless steel X5 CrNi 1810 (AISI 304)		

ELECTRICAL DATA

Power line	10m H07RN-F	Insulation class	F
Type of enclosure	IP 68	Rotation speed	2850 rpm

VACUBOX

Type	**Code No.**	Weight
VACUBOX 200-50 ABOVE FLOOR	**JP48190**	29 kg
VACUBOX 200-50 UNDERFLOOR	**JP48191**	37 kg

PRIOX


Type	**Code No.**	Voltage	Motor rating		Current
			P1	P2	
PRIOX 50-350/8 EN M	**N2110210**	1/N/PE~230 V	0.98 kW	0.65 kW	3.8 A
PRIOX 50-350/8 EN M AUT	**N2110200**	1/N/PE~230 V	0.98 kW	0.65 kW	3.8 A
PRIOX 50-350/8 EN T	**N2110220**	3/N/PE~400 V	0.98 kW	0.65 kW	1.7 A
PRIOX 50-450/9 EN M	**N2110290**	1/N/PE~230 V	1.10 kW	0.80 kW	5.0 A
PRIOX 50-450/9 EN M AUT	**N2110280**	1/N/PE~230 V	1.10 kW	0.80 kW	5.0 A
PRIOX 50-500/11 EN M	**N2110240**	1/N/PE~230 V	1.55 kW	1.00 kW	7.0 A
PRIOX 50-500/11 EN M AUT	**N2110230**	1/N/PE~230 V	1.55 kW	1.00 kW	7.0 A
PRIOX 50-500/11 EN T	**N2110250**	3/N/PE~400 V	1.40 kW	1.00 kW	2.4 A
PRIOX 50-600/13 EN T	**N2110260**	3/N/PE~400 V	1.80 kW	1.20 kW	3.1 A
PRIOX 50-800/18 EN T	**N2110270**	3/N/PE~400 V	3.00 kW	2.40 kW	5.5 A

Pentair Water Italy s.r.l.• 56010 Lugnano (PI) Italy • Tel.+39.050.716111 • Fax +39.050.716801 • info-it@pentair.com • www.jung-pumpen.com


VACUBOX

DRENA-LINE - LIFTING STATION

DIMENSIONS (ABOVE FLOOR VERSION)

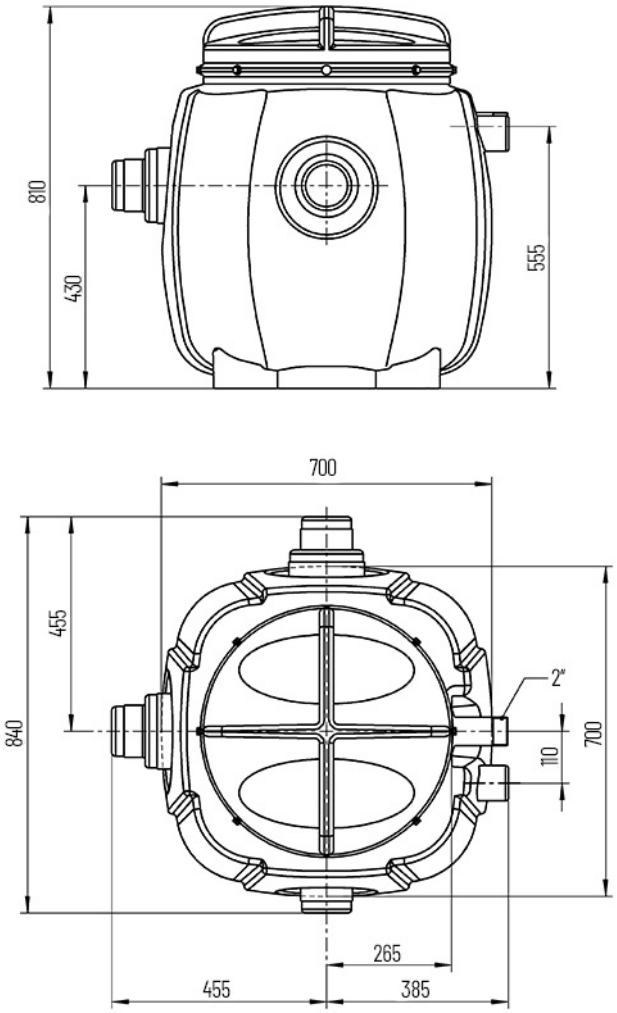

DIMENSIONS (UNDERFLOOR VERSION)

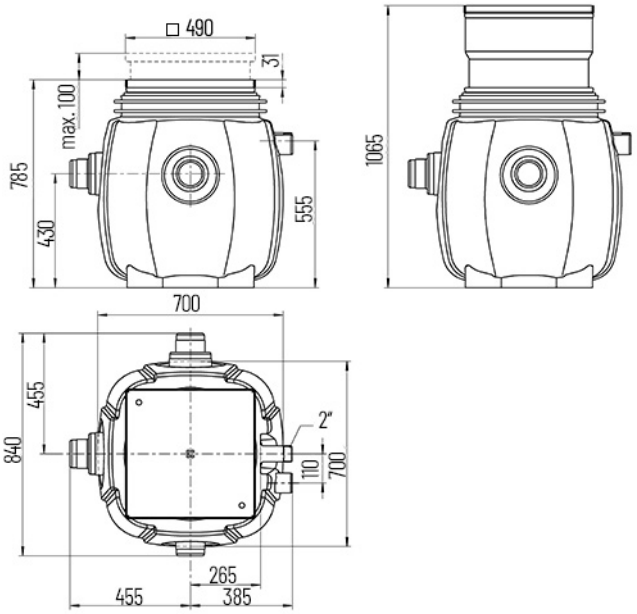


DIMENSIONS [mm]

Type	H	L	W
VACUBOX 200-50 ABOVE FLOOR	820	840	840
VACUBOX 200-50 UNDERFLOOR	795	840	840

VACUBOX
DRENA-LINE - LIFTING STATION

MECHANICAL ACCESSORIES

				Code No.
	①	**Stop-valve**	2" (DN 50), PN 16	**JP44787**
	②	**Special ventilation**	special filter with housing, not for hot water	**JP27484**
	③	**Guide rail system**	GR50 for Vacubox 200	**JP48280**
	④	**Ground water seal**	Ø500 for Baufix 200-50 / Vacubox 200	**JP48215**
	⑤	**Sump extension**	165-265 mm for Baufix 200-50 / Vacubox 200	**JP48282**

ELECTRICAL ACCESSORIES

			Code No.
	ⓐ **Level control for single units**		
	Subm. switch pack A250		**ZA012450**
	Subm. switch pack AF250	for grease-containing wastewater	**ZA012460**
	Easycontroller D10-110	Priox 50-350/8 EN T, Priox 50-500/11 EN T	**UZ014080**
	Easycontroller D10-150	Priox 50-600/13 EN T	**UZ014090**
	Easycontroller D10-220	Priox 50-800/18 EN T	**UZ014100**
	Easycontroller M10-240	Priox 50...EN M	**UZ014110-1**
	ⓑ **Level control for duplex units**		
	Submersible switch pack B250	for Hebefix 200-50 / Baufix 200-50 / Vacubox 200	**JP48229**
	Submersible switch pack BF250	for grease-containing wastewater	**JP48299**
	Easycontroller D20-110	Priox 50-350/8 EN T, 50-500/11 EN T	**UZ014150**
	Easycontroller D20-150	Priox 50-600/13 EN T	**UZ014140**
	Easycontroller D20-220	Priox 50-800/18 EN T	**UZ014130**
	Easycontroller D20-240 VB	Priox 50... EN M	**UZ014120-1**

Pentair Water Italy s.r.l.• 56010 Lugnano (PI) Italy • Tel.+39.050.716111 • Fax +39.050.716801 • info-it@pentair.com • www.jung-pumpen.com