PENTAIR
JUNG PUMPEN

100 1924 2024



US 73 + 103 HE(S)

SUBMERSIBLE DRAINAGE PUMPS FOR HOT WATER OPERATIONS

JUNG-PUMPEN.COM




Where it gets hot...

- For stationary use in laundries or communal washing facilities, for commercial dishwashers and washing machines or for the emergency overflow of a heating system.
- For heavily contaminated water with soiling up to 30 mm particle size.
- For hot water operations up to 194 F (90 °C).



... play it safe!

- Absolutely safe to run dry.
- Particularly durable due to SiC mechanical seal independent of sense of rotation and controllable oil chamber.
- In stationary use: The use of a guide rail system (accessory) reduces the risk of injury from incoming hot water.
- Attention! Not suitable for pumping waste water from lavatories and urinals!

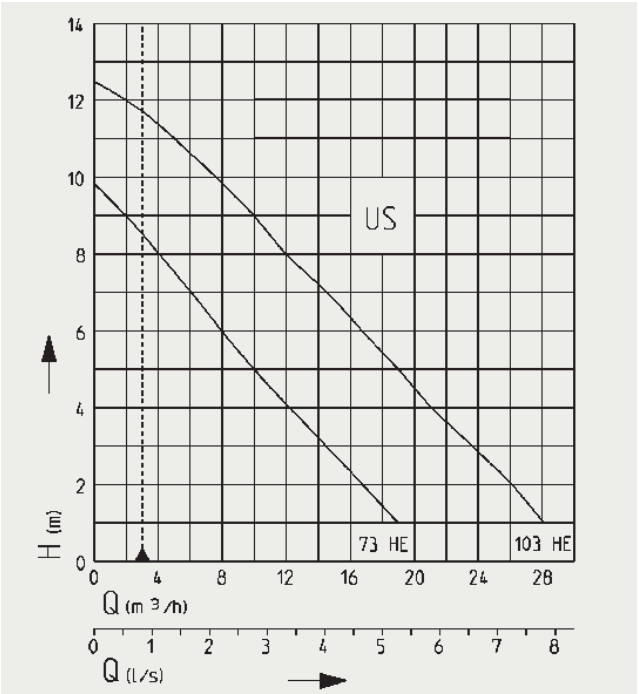

Type	US 73 HE/HES	US 103 HE/HES
H max	9,5 m	12,5 m
Q max	19 m^3/h	28 m^3/h
Voltage	1/N/PE~230 V	1/N/PE~230 V
P1	0,83 kW	1,37 kW
P2	0,50 kW	0,98 kW
Current	3,9 A	6,0 A
Motor protection	integrated	integrated
Plug	Safety	Safety

PENTAIR

JUNG PUMPEN GmbH | 33803 Steinhagen | Germany | Phone +49 5204 170 | info@jung-pumpen.de | www.jung-pumpen.com

PENTAIR and PENTAIR JUNG PUMPEN are trademarks, or registered trademarks of Pentair or its subsidiaries in the United States and/or other countries.
© 2023 Pentair Jung Pumpen

Bildquellen: Jung Pumpen GmbH, Adobe Stock
P 280-1.0-EN-2312 **PDF**