SPH 2, SPH 4

MULTISTAGE HORIZONTAL CENTRIFUGAL PUMPS


Multi-stage centrifugal electric pump, body with visible stages, horizontal, stainless steel, operating water temperature 70°C (ambient temperature 40°C), low noise. Available in single-phase or three-phase versions. Also available with stainless steel hydraulic part supports.

General characteristics

- IPX4 protection rating
- Insulation class B




HYDRAULIC PERFORMANCE

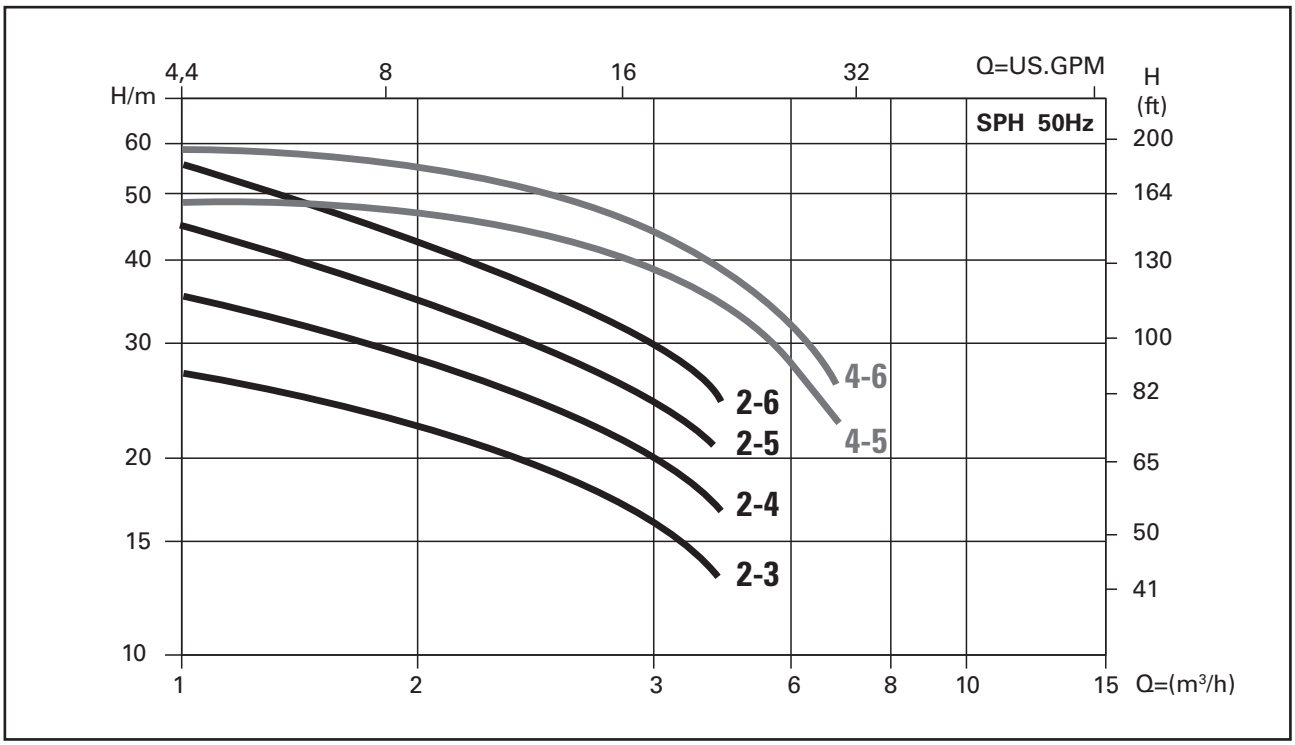

PERFORMANCE TABLE

Code	P_2 Nom.		1 ~ 50Hz Amp.	3 ~ 50Hz Amp.		m^3/h	0,5	1,0	1,5	2,0	2,5	3,0	3,5	DNM	DNA
	Hp	kW	230 V	230 V	400 V	l/min	8,3	16,6	25,0	33,3	41,6	50,0	58,3		
SPH 2-3	0,5	0,4	2,67	-	-	Total Hm in CA	28	27	24	21	20	17	14	1"	1"
SPH 2-4	0,8	0,6	3,92	-	-		36	34	32	28	26	23	17	1"	1"
SPH 2-5	0,8	0,6	3,92	-	-		46	43	40	35	33	28	22	1"	1"
SPH 2-6	1,0	0,8	4,96	-	-		54	50	48	42	38	33	25	1"	1"
SPH 2-5T	0,8	0,6	-	3,92	1,34		46	43	40	35	33	28	22	1"	1"
SPH 2-6T	1,0	0,8	-	4,96	1,8		54	50	48	42	38	33	25	1"	1"
Code	P_2 Nom.		1 ~ 50Hz Amp.	3 ~ 50Hz Amp.		m^3/h	1,0	2,0	3,0	4,0	5,0	6,0	7,0	DNM	DNA
	Hp	kW	230 V	230 V	400 V	l/min	16,6	33,3	50,0	66,6	83,3	100,0	116,7		
SPH 4-5	1,0	1,2	4,5	-	-	Total Hm in CA	46	44	41	38	32	26	20	1"	1"¼
SPH 4-6	1,1	1,5	6,1	-	-		55	53	50	45	37	31	26	1"	1"¼
SPH 4-5T	1,0	1,2	-	3,22	1,78		46	44	41	38	32	26	20	1"	1"¼
SPH 4-6T	1,1	1,5	-	4,02	2,31		55	53	50	45	37	31	26	1"	1"¼

Series 2-4

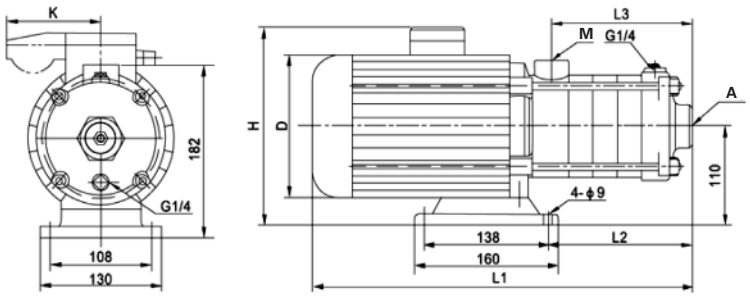

DIMENSIONS AND WEIGHTS TABLE

Type	Dimensionis mm			Weigh Kg
	L1	D	H	
SPH 2-3	323	145	215/230	15
SPH 2-4	341	145	215/230	15
SPH 2-5	359	145	215/230	15
SPH 2-6	422	170	225/245	17
SPH 4-5	455	170	225/245	17
SPH 4-6	482	170	225/245	17