SPH 8-12-15

MULTISTAGE HORIZONTAL CENTRIFUGAL PUMPS


Multi-stage centrifugal electric pump, body with visible stages, horizontal, stainless steel, operating water temperatureì 70°C (ambient temperature 40°C), low noise. Available in single-phase or three-phase versions. Also available with stainless steel hydraulic part supports.

General characteristics

- IPX4 protection rating
- Insulation class B




HYDRAULIC PERFORMANCE

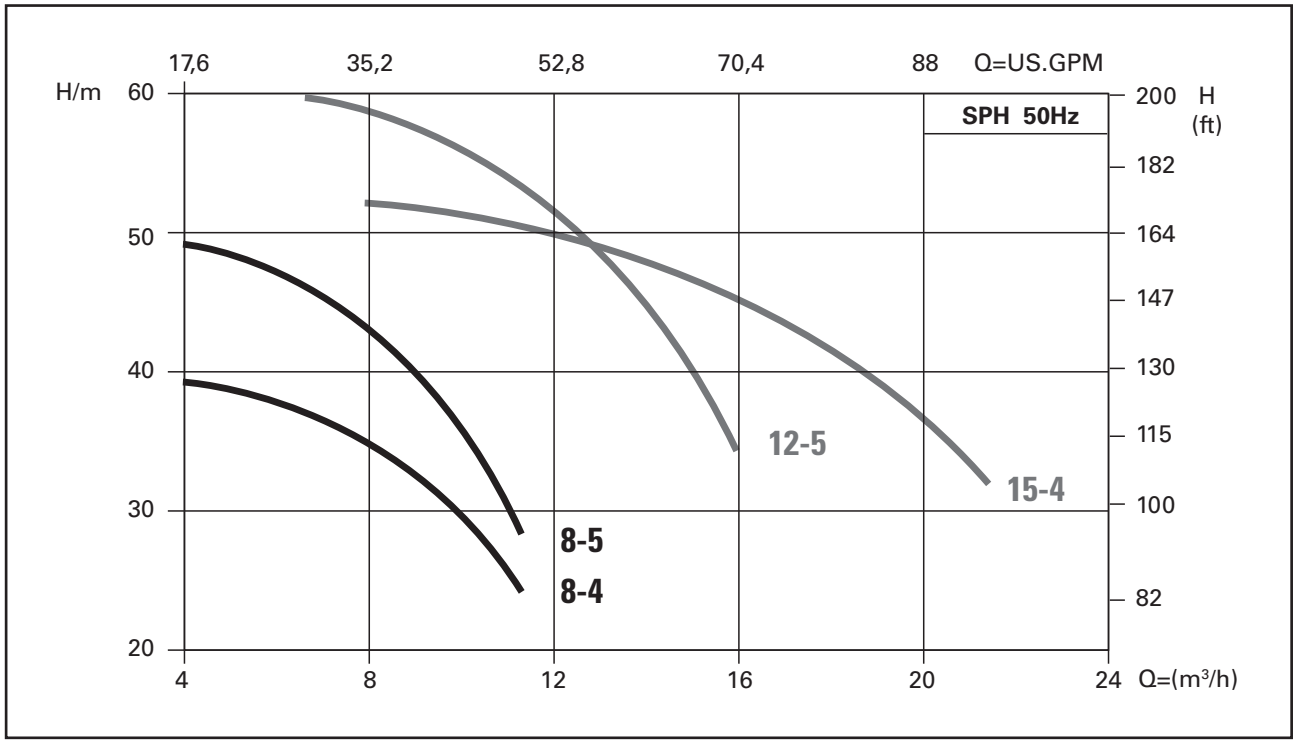


PERFORMANCE TABLE

Code	P_2 Nom.		1 ~ 50Hz Amp.	3 ~ 50Hz Amp.		m^3/h	5,0	6,0	7,0	8,0	9,0	10,0	11,0	DNM	DNA
	Hp	kW	230 V	230 V	400 V	l/min	83,3	100,0	116,7	133,4	150,0	166,7	183,4		
SPH 8-4	2,0	1,5	9,19	-	-	H m totale in CA	39	38	36	34	30	26,5	22,5	1"¼	1"½
SPH 8-4T	2,0	1,5	-	5,27	3,03		39	38	36	34	30	26,5	22,5	1"¼	1"½
SPH 8-5T	3,0	2,2	-	7,52	4,32		49	47	45	42,5	38	33,5	28	1"¼	1"½
Code	P_2 Nom.		1 ~ 50Hz Amp.	3 ~ 50Hz Amp.		m^3/h	7,0	9,0	10,0	11,0	12,0	14,0	16,0	DNM	DNA
	Hp	kW	230 V	230 V	400 V	l/min	116,6	150	166,7	183,3	200	233,3	266,6		
SPH 12-5T	4	3	-	9,91	5,75	H m	60	56,5	55	52,5	50	44	35	1"½	1"½
Code	P_2 Nom.		1 ~ 50Hz Amp.	3 ~ 50Hz Amp.		m^3/h	8	10,0	12,0	14,0	16,0	18,0	22,0	DNM	DNA
	Hp	kW	230 V	400 V	690 V	l/min	133,3	166,7	200	233,3	266,6	300	366,6		
SPH 15-4T	5,5	4	-	7,22	4,15	H m	51,5	50,5	49	46	43	40,5	31,5	2"	2"


Series 8

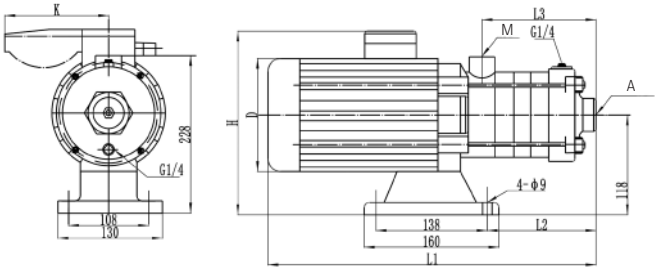

Series 12

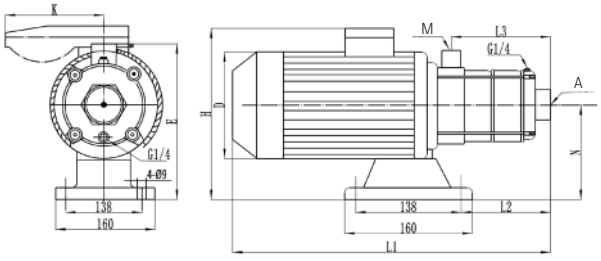

Series 15

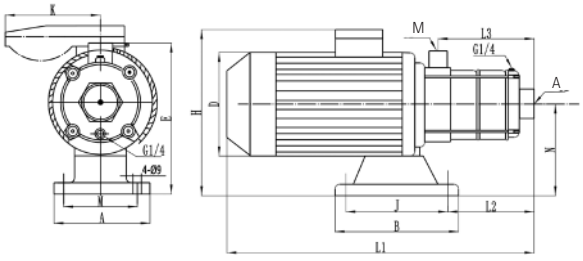

DIMENSIONS AND WEIGHTS TABLE

Type	Dimensionis mm					Weigh Kg
	L1	L2	L3	D	H	
SPH 8-4	490	186	168	180	240/270	28
SPH 8-5	520	216	198	180	240/270	30
SPH 12-5	555	216	198	195	270	34
SPH 15-4	621	340	216	220	270	41