SPV 15-20


VERTICAL MULTISTAGE CENTRIFUGAL PUMPS




Multi-stage centrifugal electric pump, vertical, stainless steel, in-line delivery and suction ports, operating water temperature 70° (ambient temperature 40°C), low noise. Available in three-phase version.

- IP55 protection rating
- Insulation class F

Series 15

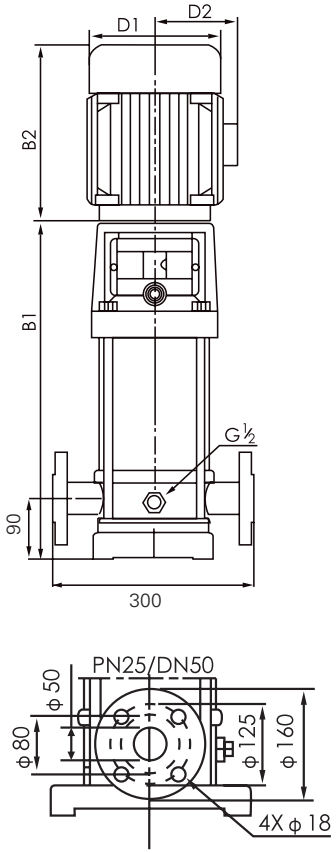


Series 20

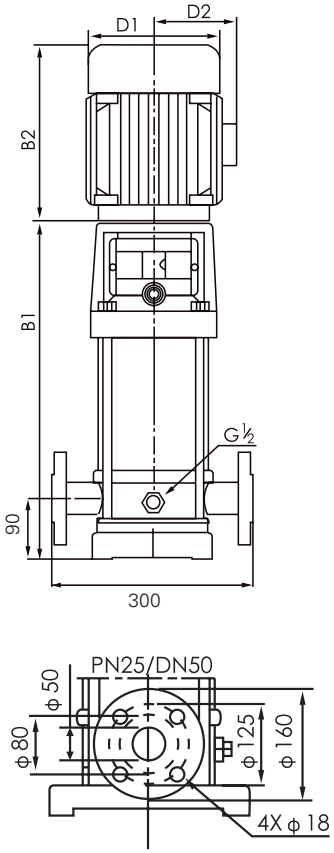

DIMENSIONS AND WEIGHTS TABLE

Type	Dimensions mm				Weight Kg	DNM	DNA
	B1	B2	D1	D2			
SPV 15-5 T	553	357	212	142	69	50	50
SPV 15-7 T	675	398	259	164	93	50	50
SPV 20-6 T	627	430	260	208	83	50	50
SPV 20-8 T	717	505	330	255	141	50	50

The overall dimensions of single-phase motors may vary. Please consult the Technical Department.

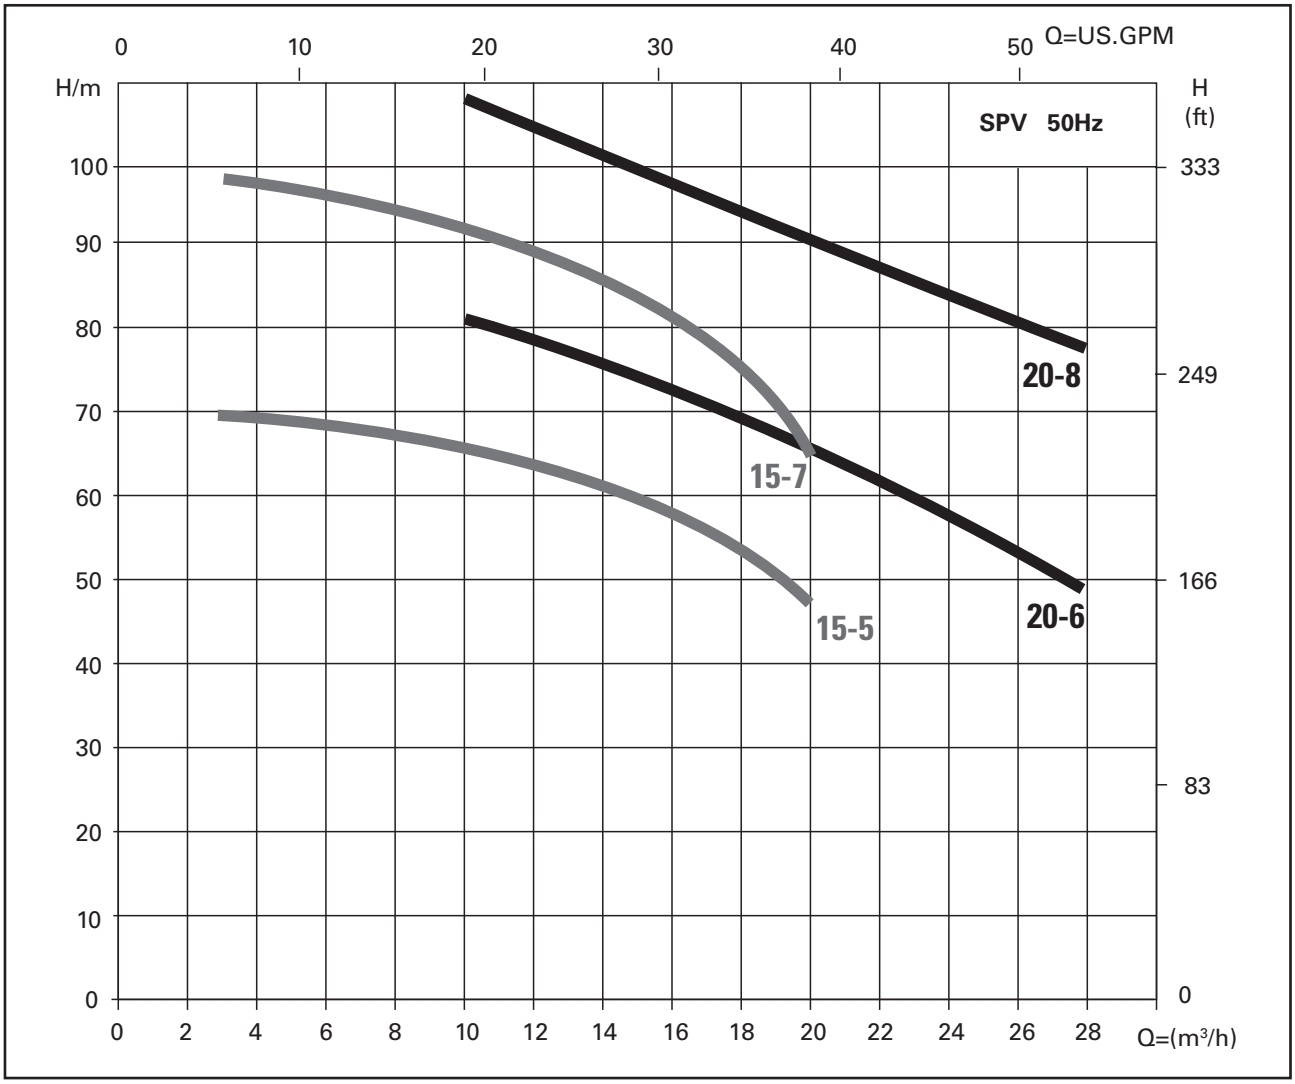

PERFORMANCE TABLE

Code	P_2 Nom.		3 ~ Amp.	3 ~ Amp.	m³/h	3	6	9	12	15	18	21	27	30	33
	Hp	kW	400 V	690 V	l/min	50	100	150	200	250	300	350	400	450	550
SPV 15-5 T	5,5	4	7,6	4,38	H m CA	70	68	66	64	58	53	48	-	-	-
SPV 15-7 T	7,5	5,5	10,3	5,93		98	96	94	89	83	75	65	-	-	-
Code	P_2 Nom.		3 ~ Amp.	3 ~ Amp.	m³/h	10	12	14	16	18	20	22	24	26	28
	Hp	kW	400 V	690 V	l/min	166,7	200	233,3	266,6	300	333,3	366,6	400	433,3	466,6
SPV 20-6 T	10	7,5	13,8	7,95	H m CA	81	79	77	75	73	70	66	61	55	49
SPV 20-8 T	15	11	20,53	11,82		109	107	105	102	99	94	89	82	75	67