SPV 5-8-10


VERTICAL MULTISTAGE CENTRIFUGAL PUMPS




Multi-stage centrifugal electric pump, vertical, stainless steel, in-line delivery and suction ports, operating water temperature 70° (ambient temperature 40°C), low noise. Available in single-phase or three-phase versions.

- IP55 protection rating
- Insulation class F

Series 5

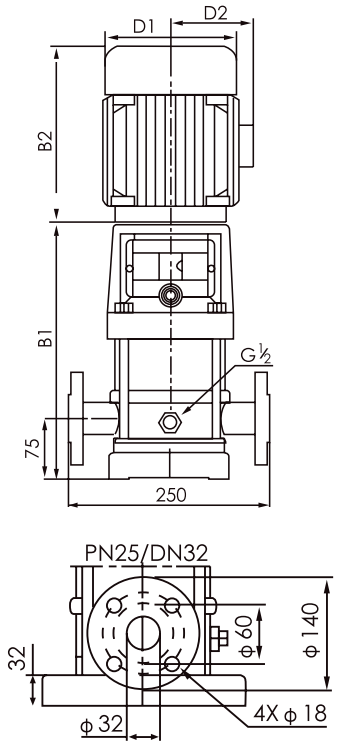


Series 8-10

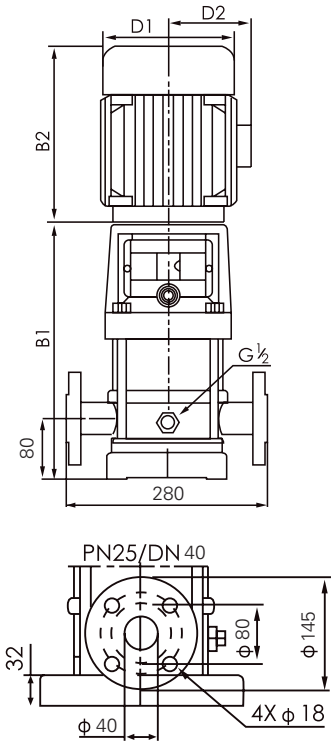

DIMENSIONS AND WEIGHTS TABLE

Type	Dimensions mm					Weight Kg	DNM	DNA
	B1	B2	B1+B2	D1	D2			
SPV 5-8	448	290	738	168	112	30	32	32
SPV 5-9	475	290	765	168	112	36	32	32
SPV 5-10	475	290	765	168	112	37	32	32
SPV 5-12	556	290	846	168	112	39	32	32
SPV 8-4	439	290	729	190	155	34	40	40
SPV 8-5	469	290	759	190	155	44	40	40
SPV 8-6	499	290	789	190	155	44	40	40
SPV 10-5	469	290	759	190	155	47	40	40
SPV 10-6	499	290	789	190	155	48	40	40
SPV 10-7	539	325	894	197	165	54	40	40
SPV 10-8	569	325	894	197	165	55	40	40
SPV 10-10	629	335	964	230	199	68	40	40

The overall dimensions of single-phase motors may vary. Please consult the Technical Department.

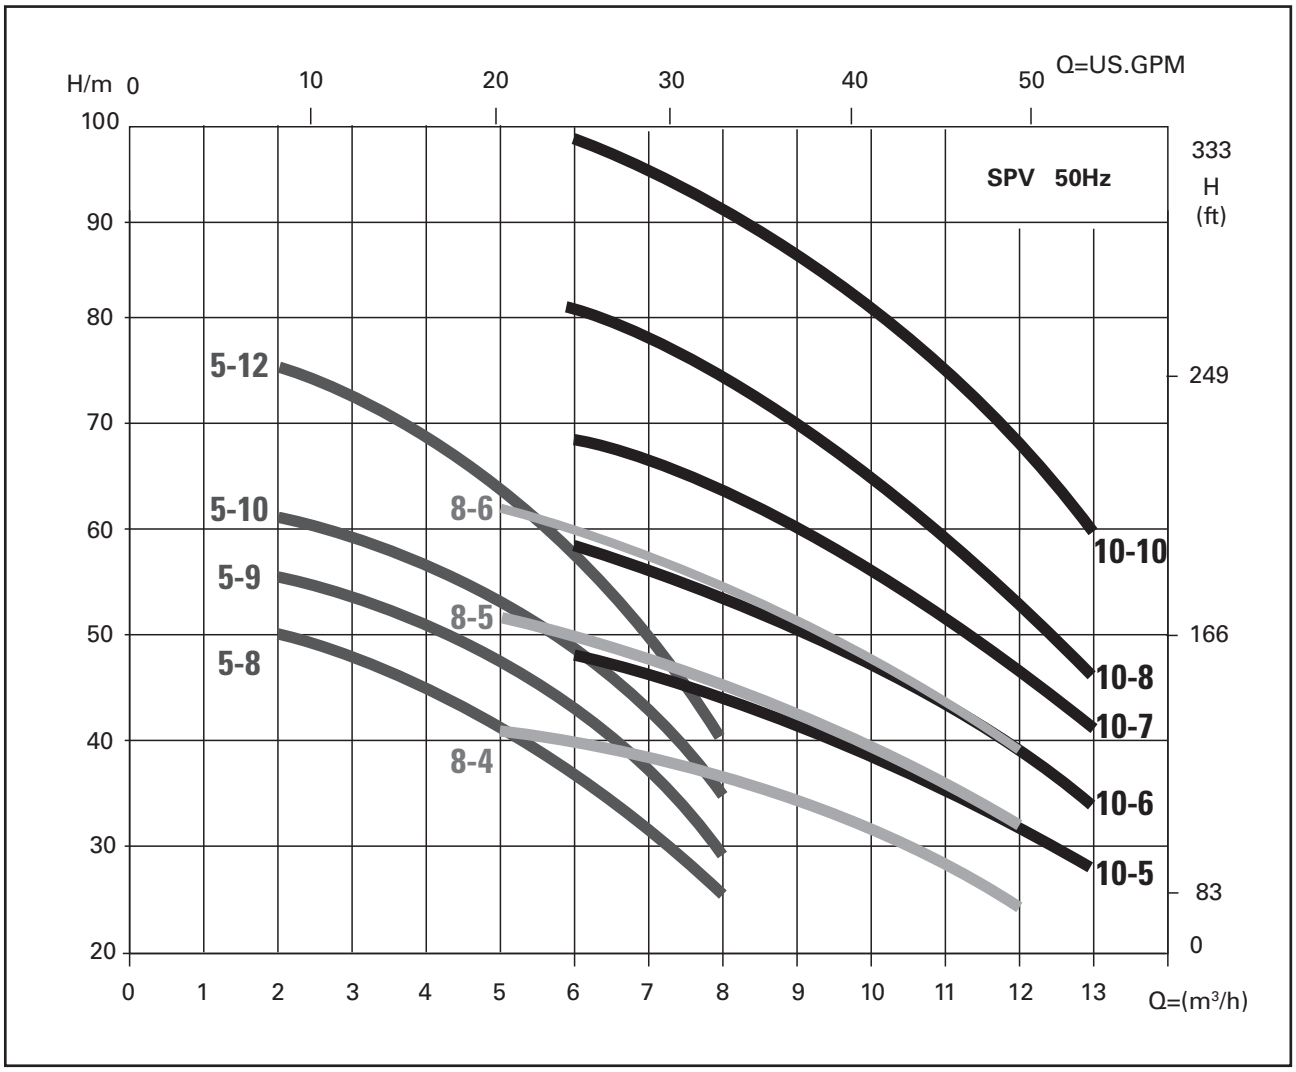

PERFORMANCE TABLE

Code	P_2 Nom.		3 ~ Amp.	3 ~ Amp.	3 ~ Amp.	1 ~ Amp.	m³/h	2	3	4	5	6	7	8	9	10	11	12	13
	Hp	kW	230 V	400 V	690 V	230 V	l/min	33,3	50	66,6	83,3	100	116,7	133,4	150	167	183,4	200	216,7
SPV-LQDL 5-8	1,5	1,1	-	-	-	6,50	Total Hm in CA	50	48	46	42	37	33	27	-	-	-	-	-
SPV-LQDL 5-9	2,0	1,5	-	-	-	8,80		56	54	51	48	43	37	30	-	-	-	-	-
SPV-LQDL 5-10	2,0	1,5	-	-	-	8,80		62	60	57	53	47	41	34	-	-	-	-	-
SPV-LQDL 5-8T	1,5	1,1	4,30	2,65	-	-		50	48	45	42	37	33	27	-	-	-	-	-
SPV-LQDL 5-9T	2,0	1,5	5,80	3,40	-	-		56	54	51	48	43	37	30	-	-	-	-	-
SPV-LQDL 5-10T	2,0	1,5	5,80	3,40	-	-		62	60	57	53	47	41	34	-	-	-	-	-
SPV-LQDL 5-12T	3,0	2,2	8,20	4,75	-	-		75	72	68	64	57	50	40	-	-	-	-	-
SPV-LQDL 8-4	2,0	1,5	-	-	-	8,80		-	-	-	41	39	38	36	34	32	28	26	-
SPV-LQDL 8-4T	2,0	1,5	5,80	3,30	-	-		-	-	-	41	39	38	36	34	32	28	26	-
SPV-LQDL 8-5T	3,0	2,2	8,20	4,70	-	-		-	-	-	52	50	48	45	42	40	36	32	-
SPV-LQDL 8-6T	3,0	2,2	8,20	4,70	-	-		-	-	-	62	60	57	54	51	48	43	39	-
SPV-LQDL 10-5T	3,0	2,2	8,20	4,70	-	-		-	-	-	-	48	47	45	42	39	36	32	29
SPV-LQDL 10-6T	3,0	2,2	8,20	4,70	-	-		-	-	-	-	58	56	54	51	47	43	39	34
SPV-LQDL 10-7T	4,0	3,0	11,10	6,50	-	-		-	-	-	-	69	66	63	60	56	51	46	41
SPV-LQDL 10-8T	4,0	3,0	11,10	6,50	-	-		-	-	-	-	79	76	73	69	64	58	52	46
SPV-LQDL 10-10T	5,5	4,0	-	-	4,38	-		-	-	-	-	100	96	92	87	80	74	66	59